

CORESTRIPPER.COM



HYDRAULIC CORE STRIPPERS



MODEL CS-18

Maximum Roll: 18" Long X 13" Diameter
Power: 3 HP, 220/440 Volt, 3 Phase
Controls: 24 Volt DC, Dual Palm Buttons
Cycle Time: 3 Seconds (Dry)
Oil Reservoir: 10 Gallons



MODEL CS-32

Maximum Roll: 32" Long X 16" Diameter
Power: 3 HP, 220/440 Volt, 3 Phase
Controls: 24 Volt DC, Dual Palm Buttons
Cycle Time: 3 Seconds (Dry)
Oil Reservoir: 10 Gallons

MODEL CS-42

Maximum Roll: 42" Long X 23" Diameter
Power: 5 HP, 220/440 Volt, 3 Phase
Controls: 24 Volt DC, Dual Palm Buttons
Cycle Time: 5 Seconds (Dry)
Oil Reservoir: 10 Gallons

MODEL CS-54

Maximum Roll: 54" Long X 23" Diameter
Power: 5 HP, 220/440 Volt, 3 Phase
Controls: 24 Volt DC, Dual Palm Buttons
Cycle Time: 5 Seconds (Dry)
Oil Reservoir: 10 Gallons

MODEL CS-66


Maximum Roll: 66" Long X 23" Diameter
Power: 220/440 Volt, 3 Phase
Controls: 24 Volt DC, Dual Palm Buttons
Cycle Time: 5 Seconds (Dry)
Oil Reservoir: 10 Gallons

**Note: AW46 Hydraulic Oil is NOT Included
Machines are designed for 3" I.D. Cores



- Hydraulically Powered “Shear-Action” Blade
- Cut Material Falls Directly into Container Below
- Dual Palm Button Operation Features Anti-Repeat Interlock
- Blade Carrier Attachment Helps you Safely Replace Dull Blades
 - Available on CS-42, CS-54, and CS-66
- Jack Screw Makes Cut Depth Adjustments Easy and Fast, without Resetting Limit Switches
- Available in Sizes for Stripping Up to 66” Cores in 23” Diameter
- Easy Loading, Swing Out Mandrel with Electrical Interlock Keeps Hands Away from Blade at All Times
 - Available on CS-42, CS-54, and CS-66

We Recommend One Spare Blade be Purchased with Each Machine Ordered to Eliminate Down Time while Sharpening the Blade. Blades are Manufactured from D2 Tool Hardened Steel.

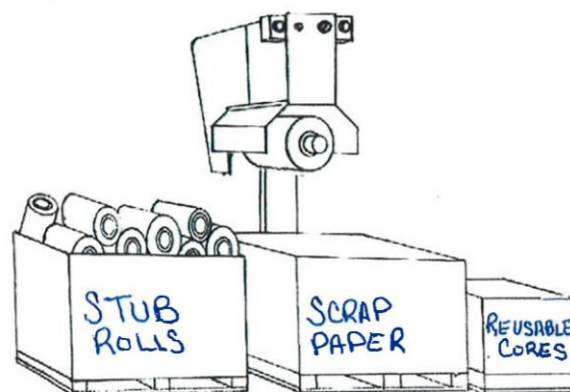

DON'T WASTE IT, STRIP IT, WITH CORESTRIPPER.COM

Ph: (267) 272-5089 • Sales@corestripper.com • www.corestripper.com

May 2019